




# Appendix A

## Louisiana State University Construction Specifications

Figure 1

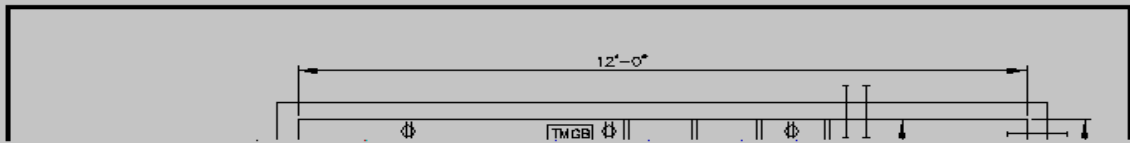


Equipment racks shall be constructed of aluminum, shall be 19 inches wide, and floor mountable. All racks shall be anchored using drop in anchor bolts. Minimum floor space supported from the top of the rack using a ladder type tray. The tray will be used to support the rack and also to transition the cable from the rack to the wall. **No cables will free span from the wall to the rack.**

Figure 2



Equipment racks shall be constructed of aluminum, shall be 19 inches wide, and floor mountable. All racks shall be anchored using drop in anchor bolts. Minimum floor space required shall be 34" uswctg" hggv." 5) htqpvd{ "6" fggr" rgt" tce m0"" Vjg" tce m"\*qt" tce mu+" will be supported from the top of the rack using a ladder type tray. The tray will be used to support the rack and also to transition the cable from the rack to the wall. **No cables will free span from the wall to the rack.**






Figure 4

Figure Notes:

1. Mgr"cmn ecdngu"tqwvgf"cv hnqqt"dgnqy"34ö

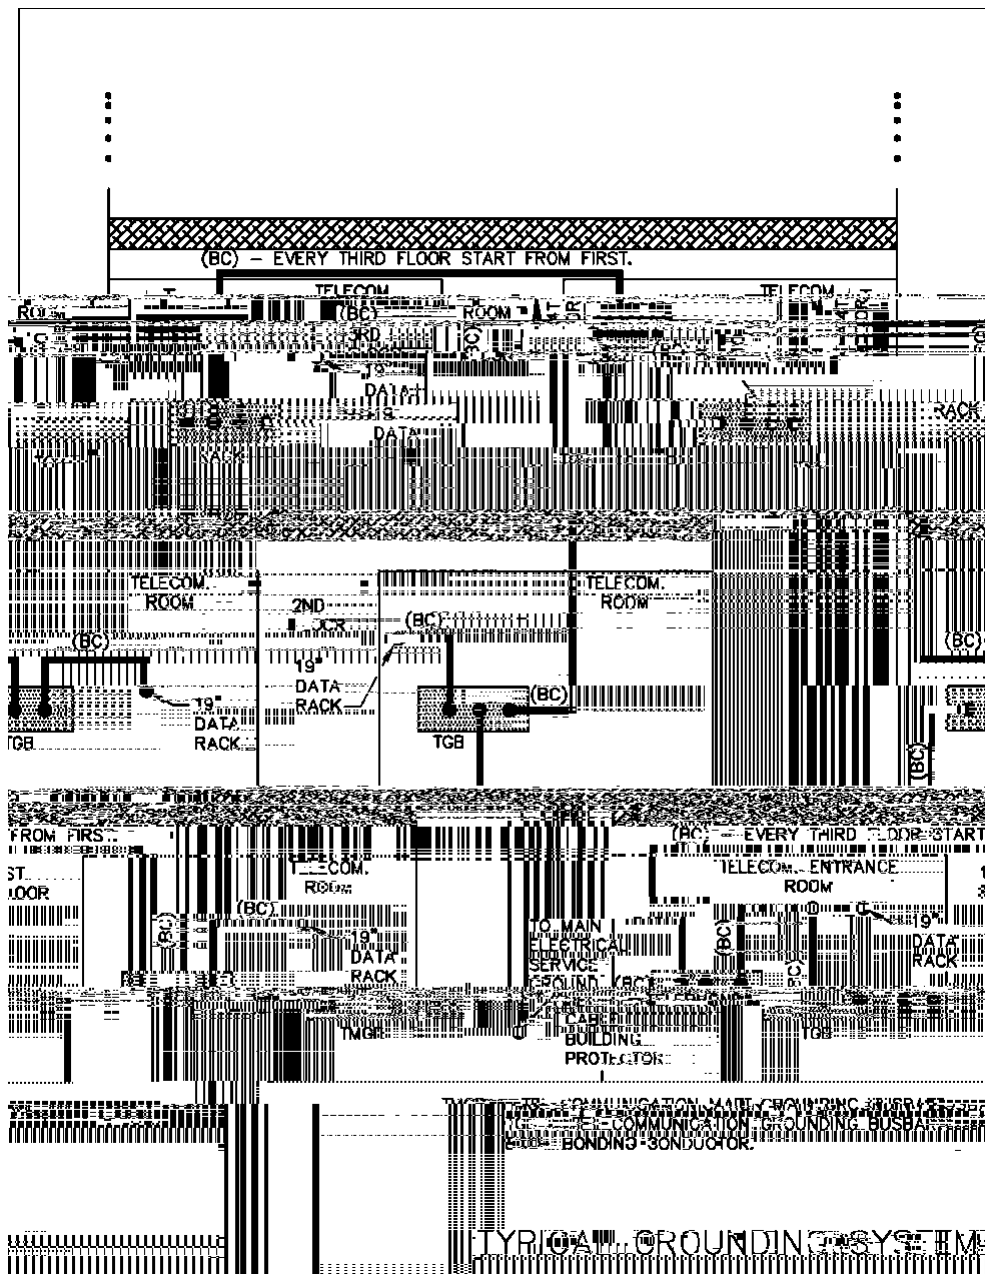








Figure 8



# **Appendix A**

## **Louisiana State University Construction Specifications**